

# 2 Channel SPCO Relay Unit



### Key Features

- » Two channel relay unit.
- » Volt free 3A 240V relay contact to changeover.
- » Powered by Mode M-BUS.
- » Control of motorised blinds, screens and curtains.
- » Compact design.
- » Complies with EC EMC and Low Voltage Directives (CE).
- » 2 year warranty.

This two channel Relay Module provides the ideal satellite solution for local control of motorised devices such as curtains, blinds and screens or for remote and contact output control.

With two independently programmable 3A rated changeover relays the unit can also be employed to control many other switched loads. The module connects and is powered by the Mode M-BUS and its compact size means that it can easily be hidden away in the smallest of spaces.




## System Architecture

### Switch Wiring Example



### Blind Wiring Example

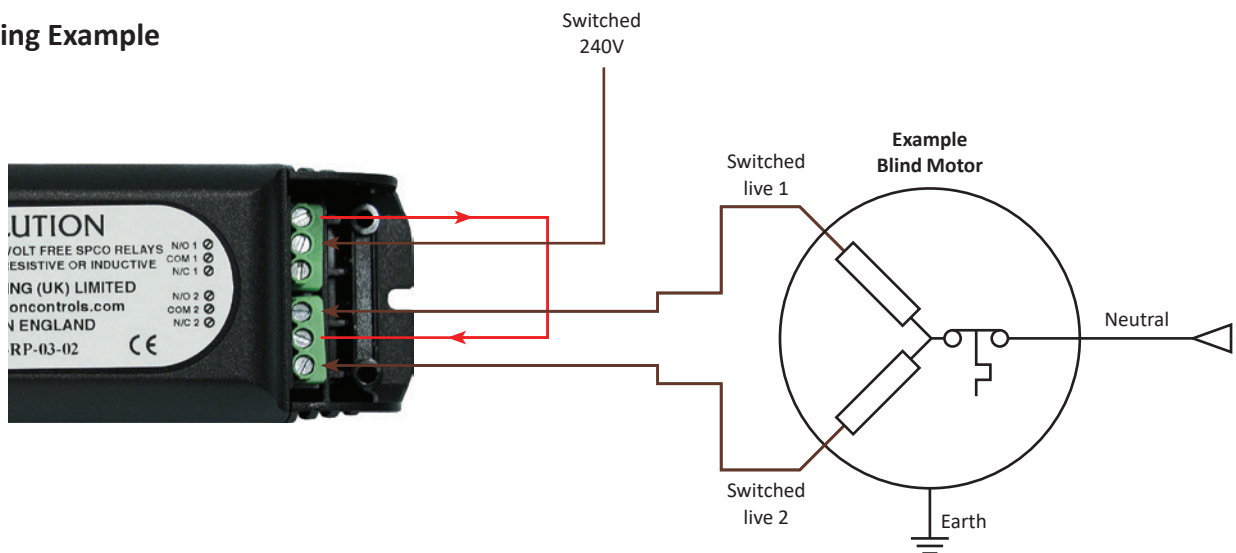

## Technical Data

Power	
Power Supply	» +24V (from M-BUS)
Connections & Cable Specifications	
Protocol	» Mode M-BUS
Contact Input	» 2 x SPCO relay contact inputs
AC Rating	» 3A resistive or inductive (240V AC)
DC Rating	» 3A resistive or inductive (35V DC maximum)
Mechanical	
Dimensions	» 50mm High x 150mm Wide x 34mm Deep
Weight	» 0.15kgs
Fixing Centres	» 144mm

Installation should be in accordance with the relevant National Wiring Regulations and other applicable Regulations. Compliance to EC EMC and Low Voltage Directives may be invalidated if not used or installed according to the published specification.

EVO-RP-03-02 should be located in well ventilated areas and should not be covered or enclosed by insulating materials.

Mode reserve the right to amend the product specification or design at any time and without notice.



Mode Lighting Limited. The Maltings, 63 High Street, Ware, Hertfordshire, SG12 9AD. United Kingdom.  
 Tel: +44 (0) 1920 462121 | Fax: +44 (0) 1920 466881 | Email: sales@modellighting.com | www.modellighting.com