


SET-D4SC100-MR-7-W

Sensor Cable

set square
energy saving controls

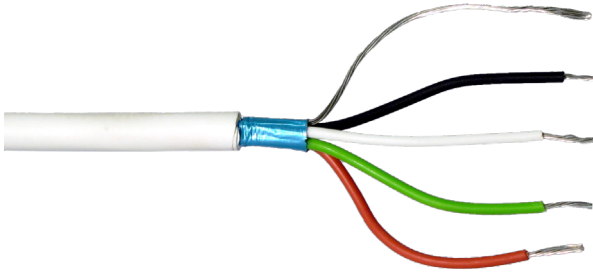

Recommended cable for connecting Setsquare Sensors to the LCM, DDC or POD units:-

Connection of:
SET-PDOCH
SET-DOL
SET-ALD5
SET-SLM

Key Features

- » 4-Core stranded tinned copper (7 x 0.2 mm² per core)
- » An overall aluminium foil shielded 440V RMS.
- » Inner shield drain wire stranded tinned copper (7 x 0.2 mm²)
- » Core colour code- Red, Black, Green, White.
- » White LSHF (Low Smoke Halogen Free) outer sheath.
- » Overall nominal diameter- 4.1mm.
- » Mains containment rated, suitable to run alongside 600v.
- » Defence standard to 61-12 Part 4.
- » 100m reel.
- » Mode Lighting products are guaranteed for two years.

infrapod

daylux

CE