

SET-OP Luminaire Lead

set square
energy saving controls




The SET-OP range of output leads connects the light fitting to the DLCM (Lighting Control Module). A multicore cable with colour coded cores of 1.0mm² stranded copper.

Key Features

- » Output Lead for connecting DLCM to Light Fitting.
- » Low Smoke Halogen Free (LSHF) sheathing.
- » Carries Mains Power, Dimming Pair and Maintained Emergency Live.
- » Mode Lighting products are guaranteed for two years.



System Architecture

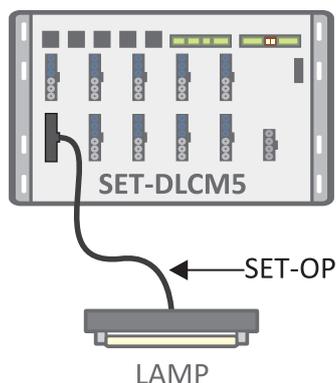

Technical Data

| Output Cable | | | | | |
|------------------|------------------------------------|------------------|------------------|--------------|---|
| Type | » 3, 4, 5 or 6 core cable | | | | |
| Supply Plug | » Weiland GST18i6 (Black and Blue) | | | | |
| CSA per core | » 1.0mm ² | | | | |
| Core Material | » Copper | | | | |
| Sheathing | | | | | |
| Rating | » LSHF Low Smoke Halogen Free | | | | |
| Colour Coding | | | | | |
| Red | » Dimming + | | | | |
| White | » Dimming - | | | | |
| Black | » Emergency Live | | | | |
| Blue | » Neutral | | | | |
| Green | » Earth | | | | |
| Brown | » Live | | | | |
| Part Codes | | | | | |
| Cores | 3 Metre | 4 Metre | 5 Metre | 7 Metre | Description |
| 3 Core | SET-OP-3C-3M | SET-OP-3C-4M | SET-OP-3C-5M | SET-OP-3C-7M | Mains Output Lead for Switching |
| 4 Core | SET-OP-4C-3M | SET-OP-4C-4M | SET-OP-4C-5M | SET-OP-4C-7M | Mains Output Lead for Switching and Maintained Live |
| 5 Core | SET-OP-5C-3M | SET-OP-5C-4M | SET-OP-5C-5M | SET-OP-5C-7M | Output Lead with Dimming |
| 6 Core | SET-OP-6C-3M | SET-OP-6C-4M | SET-OP-6C-5M | SET-OP-6C-7M | Output Lead with Dimming and Maintained Live |
| 6 Core Extension | SET-OP-6C-3M-EXT | SET-OP-6C-4M-EXT | SET-OP-6C-5M-EXT | SET-OP-6C-7M | Output Lead with Dimming and Maintained Live |

Works With

| Product Codes | Description |
|---------------|-------------------------------------|
| SET-DLCM3 | » Pluggable Lighting Control Module |
| SET-DLCM5 | » Pluggable Lighting Control Module |



Mode Lighting Limited. The Maltings, 63 High Street, Ware, Hertfordshire, SG12 9AD. United Kingdom.
 Tel: +44 (0) 1920 462121 | Fax: +44 (0) 1920 466881 | Email: sales@modellighting.com | www.modellighting.com