


Power Unit: Single Channel

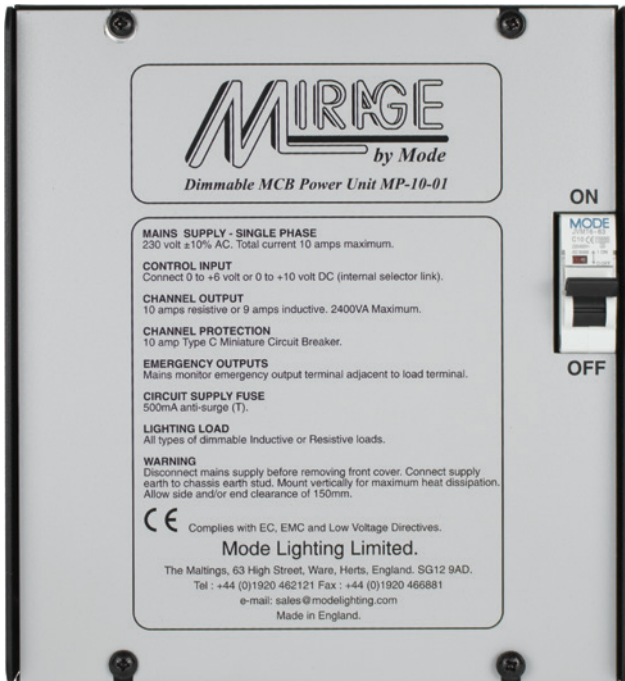

The Mirage MP-10-01 is a wall mounting, single channel, Dimmable Power Unit designed for the reliable mains dimming of resistive or inductive lighting loads using Leading Edge Dimming Technology.

It is rated at 10A resistive or 9A inductive and is protected by a 10A Type C Miniature Circuit Breaker (MCB).

The control input can be either 0-6V or 0-10V from the Mode control systems or 1-10V sinking control from Building Management Systems.


The MP-10-01 is mounted in a black aluminium case with a natural anodised silver front panel.

Key Features

- » Single dimmable channel of 10A resistive or 9A inductive loads.
- » Up to 2A of compatible LED load per channel.
- » Leading Edge Dimming Technology.
- » Control input suitable for use with 0-6V, 0-10V and 1-10V controllers.
- » 10A Type C MCB Circuit Protection.
- » Emergency Fixed Live MCB protected output for maintained emergency supply.
- » LED channel monitor to indicate the operation of the output.
- » Supply input 230/240V. 50-60Hz. 40A maximum (100-125V option available).
- » Internal test switch to enable unit to be locally tested to full on.
- » Triacs with screw fixings can be removed for servicing.
- » External supply low voltage DC for use with remote dimmers and ancillary equipment.
- » Conduit cable entries (four) 21mm diameter suitable for use with conduits and trunking.
- » Complies with EC EMC and Low Voltage Directives (CE).
- » 2 year warranty.



System Architecture

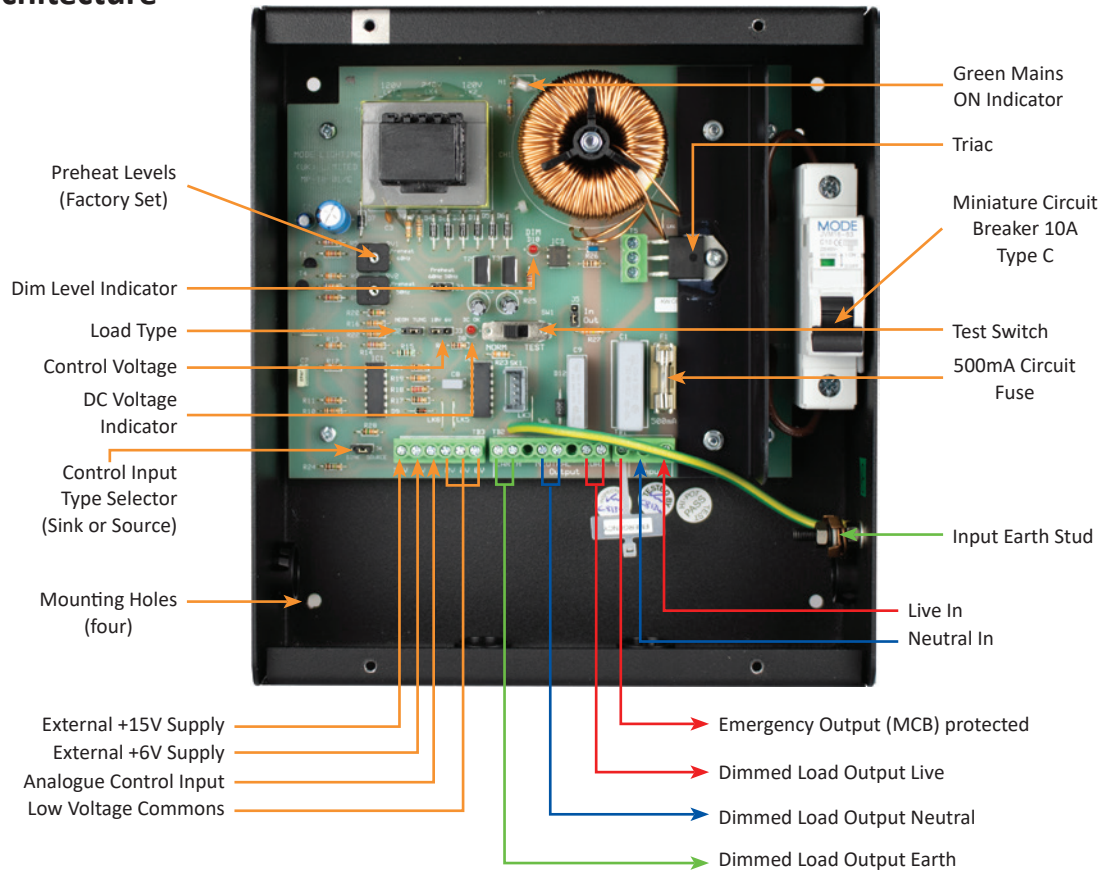

Technical Data

| Power | |
|------------------------------------|---|
| Mains Supply | » 230V AC +/- 10% 50/60Hz, 10A maximum |
| Control Fuse | » 20mm x 5mm 500mA HRC ceramic |
| Earth | » This product must be earthed |
| Connections & Cable Specifications | |
| Channel Outputs | » Single channel of 10A resistive or 9A inductive loads » Up to 2A for LED loads depending on LED de-rating factor » Check with LED lamp manufacturer for recommended number of lamps on a 10A MCB or RCBO* |
| Load MCB | » Individual Miniature Circuit Breaker (MCB) 10A Type C |
| Control Input (i) | » 0-6V or 0-10V DC analogue control (selectable) |
| Control Input (ii) | » 1-10V DC sinking (selectable) |
| Mechanical | |
| Standards | » EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN60439-1, EN60950 |
| Conduit Entries | » Four off 21mm diameter |
| Dimensions | » 220mm High x 200mm Wide x 75mm Deep |
| Fixing Centres | » 182mm x 178mm |
| Weight | » 1.35kgs |
| Packed Size | » 230mm High x 227mm Wide x 82mm Deep |
| Packed Weight | » 1.5kgs |

Note
For additional technical information refer to Installation Guide MP-10-01.

*The maximum number of lamps on a circuit and dimming performance will vary for different lamps and manufacturers. Users should verify performance and dimming range with the lamp manufacturer. For further advice please contact your local distributor or the Mode Lighting Technical team.

Installation should be in accordance with the relevant National Wiring Regulations and other applicable Regulations. Compliance to EC EMC and Low Voltage Directives may be invalidated if not used or installed according to the published specification.

MP-10-01 should be located in well ventilated areas and should not be covered or enclosed by insulating materials.

Mode reserve the right to amend the product specification or design at any time and without notice.



Mode Lighting Limited. The Maltings, 63 High Street, Ware, Hertfordshire, SG12 9AD. United Kingdom.
Tel: +44 (0) 1920 462121 | Fax: +44 (0) 1920 466881 | Email: sales@modelight.com | www.modelight.com