


# SET-D4SC100-MR-7-W

## Sensor Cable

**set square**  
energy saving controls

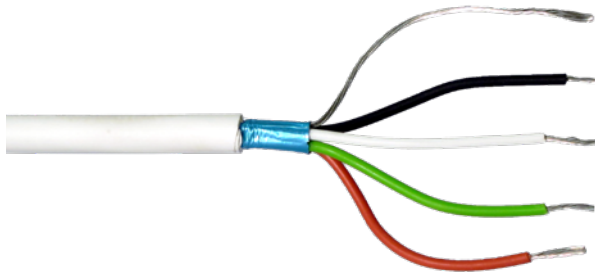

Recommended cable for connecting Setsquare Sensors to the LCM, DDC or POD units:-

Connection of:  
SET-PDOCH  
SET-DOL  
SET-ALD5  
SET-SLM

### Key Features

- » 4-Core stranded tinned copper (7 x 0.2 mm<sup>2</sup> per core)
- » An overall aluminium foil shielded 440V RMS.
- » Inner shield drain wire stranded tinned copper (7 x 0.2 mm<sup>2</sup>)
- » Core colour code- Red, Black, Green, White.
- » White LSHF (Low Smoke Halogen Free) outer sheath.
- » Overall nominal diameter- 4.1mm.
- » Mains containment rated, suitable to run alongside 600v.
- » Defence standard to 61-12 Part 4.
- » 100m reel.
- » Mode Lighting products are guaranteed for two years.


infrapod

daylux

 **MADE IN  
BRITAIN**

CE

## System Architecture

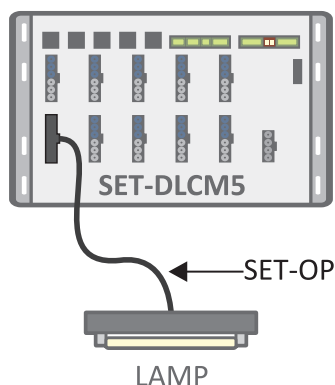

## Technical Data

Output Cable					
Type	» 3, 4, 5 or 6 core cable				
Supply Plug	» Weiland GST18i6 (Black and Blue)				
CSA per core	» 1.5mm <sup>2</sup>				
Core Material	» Copper				
Sheathing					
Rating	» LSHF Low Smoke Halogen Free				
Colour Coding					
Red	» Dimming +				
White	» Dimming -				
Black	» Emergency Live				
Blue	» Neutral				
Green	» Earth				
Brown	» Live				
Part Codes					
Cores	3 Metre	4 Metre	5 Metre	7 Metre	Description
3 Core	SET-OP-3C-3M	SET-OP-3C-4M	SET-OP-3C-5M	SET-OP-3C-7M	Mains Output Lead for Switching
4 Core	SET-OP-4C-3M	SET-OP-4C-4M	SET-OP-4C-5M	SET-OP-4C-7M	Mains Output Lead for Switching and Maintained Live
5 Core	SET-OP-5C-3M	SET-OP-5C-4M	SET-OP-5C-5M	SET-OP-5C-7M	Output Lead with Dimming
6 Core	SET-OP-6C-3M	SET-OP-6C-4M	SET-OP-6C-5M	SET-OP-6C-7M	Output Lead with Dimming and Maintained Live
6 Core Extension	SET-OP-6C-3M-EXT	SET-OP-6C-4M-EXT	SET-OP-6C-5M-EXT	SET-OP-6C-7M	Output Lead with Dimming and Maintained Live

## Works With

Product Codes	Description
SET-DLCM3	» Pluggable Lighting Control Module
SET-DLCM5	» Pluggable Lighting Control Module



Mode Lighting Limited. The Maltings, 63 High Street, Ware, Hertfordshire, SG12 9AD. United Kingdom.  
 Tel: +44 (0) 1920 462121 | Fax: +44 (0) 1920 466881 | Email: sales@modelighting.com | www.modelighting.com